SEETRONIC

Product Type   **RJ45 Plug**

Product Model   **SE8FC-05**

Customer Name

Manufacturer	**Prepared**	**Checked**	**Approved**

Customer	**Received**	**Checked**	**Confirmed**

Distributor:

Techni-Lux

Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com
www.techni-lux.com

SEETRONIC

Product Type	**RJ45 Plug**
Product Model	**SE8FC-05**

Product Features

➢ Match with SE8MC-05 for connecting cables and enabling aerial docking during mating

➢ Ideal for any harsh and demanding outdoor environment with waterproof rating IP65

➢ Cable connector carrier does not include RJ45 plug

➢ Cable OD 5-7 mm

➢ Sturdy die-cast shell and unique cable clamp

➢ Complies with Cat5e according to TIA/EIA 568B and ISO/IEC 11801 standard

➢ It can replace SE8FF-05 which is more economical, beautiful, convenient and in line with the trend of miniaturization

SEETRONIC

Product Parameters

Item	Specification
Connection type	RJ45
Gender	Female

Electrical Parameters

Item	Specification
Contact resistance	≤ 10 mΩ
Dielectric strength	1 KV DC
Insulation resistance	≥ 0.5 GΩ
Rated current	1.5 A
Rated voltage	50 V
Frequency range	1 - 100 MHz
Transmission performance	CAT5e

SEETRONIC

Mechanical Parameters

Item	Specification
Cable OD	5-7mm
Insertion force	≤ 20 N
Withdrawal force	≤ 20 N
Service life	> 1000 mating cycles

Material and Environmental Parameters

Item	Specification
Boot	PA
Housing	Zinc alloy
Housing plating	Cr
Contacts	Cu alloy
Contact plating	Au
Flame-retardant grade	UL 94-V0
Temperature range	-30°C ~ +80°C

Standards and Certifications

Standards	TIA/EIA 586B, IEC11801

SEETRONIC

Product Drawing

76.70±1.00

ø24.70±0.20

Unit: mm
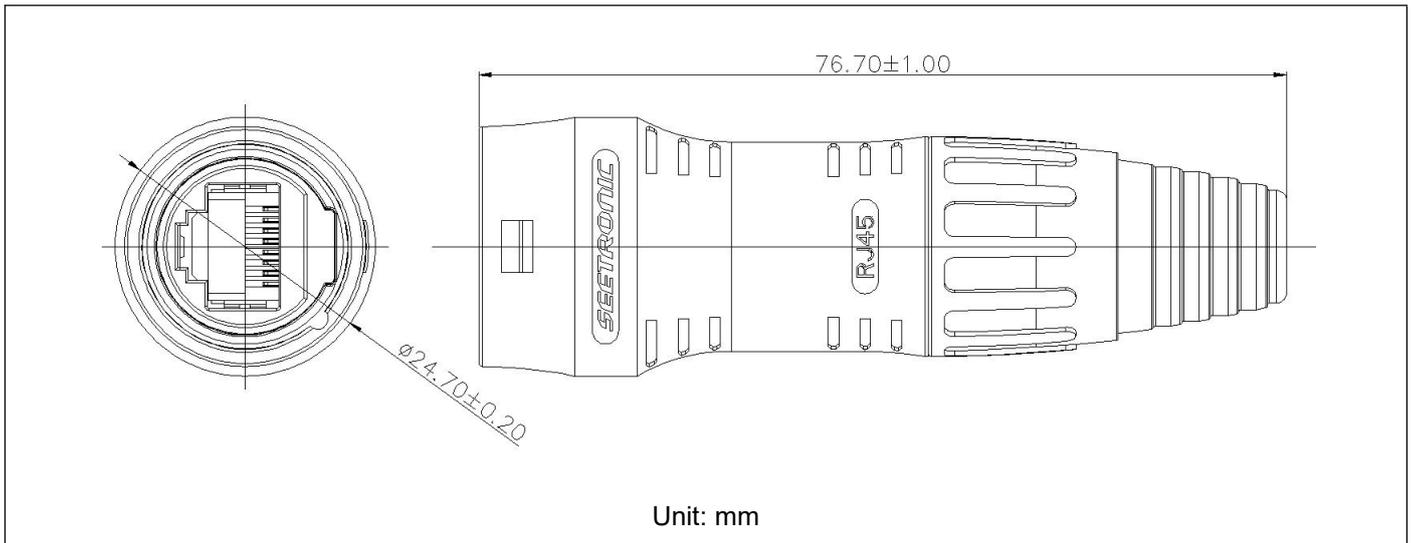
Packaging Method

1 pc per bag (include 1 pc each of housing, cable clamp and boot)
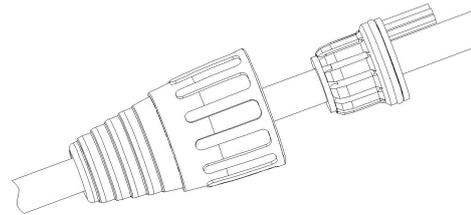80 pcs per inner carton, 5 inner cartons per master carton (400 pcs per master carton)

Accessory

☑   No accessories   ☐   Back fastener plate
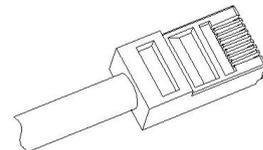☐   Screws and Nuts   ☐   Other

Product Data Sheet
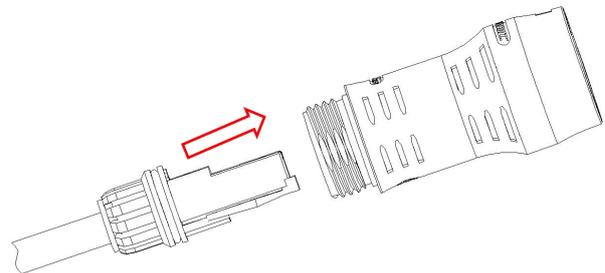
Assembly Instructions

(1) Thread the cable through the boot and the waterproof cable clamp.	
(2) Assemble the cable with RJ45	
(3) Push the assembled cable clamp and RJ45 into the housing	
(4) After assembly of the cable clamp, RJ45 and housing, tighten the boot in a clockwise direction	