
Data Sheet

Document PN: 50071

www.enttec.com



RGB LED Tape 9VL4

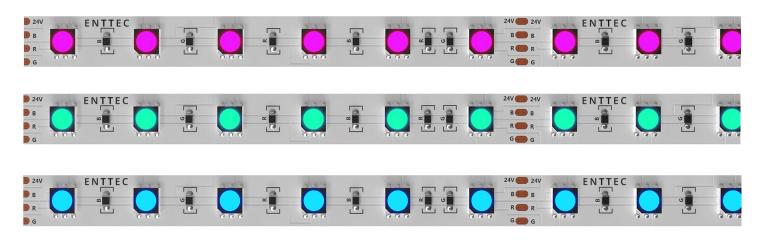

Features

- High grade RGB leds for maximum colour vibrancy and longevity
- 12mm pitch
- Customized Length available
- 60pcs of RGB LEDs per meter
- High light output
- LEDs dimmable by ENTTEC CV Driver or DIN-LED4PX
- · Can be joined together
- Can be cut to a smaller length
- Minimum cut length 100mm
- Input and output connections (loose cable)
- Constant Voltage control
- IP20 Indoor use only

Specifications

Item	Value
Input Voltage	24V DC
Power consumption (W/m)*	
Red	4.45
Green	3.31
Blue	3.12
Luminance (lm/m)	
Red	66
Green	179
Blue	42.6
CCT (all leds on)	7000K
Beam Angle	120Deg
Net Weight (g/m)	30
Connection (In/Out)	Solder tabs

^{*}Please Note: Operating the strip without a proper heat-sink can permanently damage the electronics and void the warranty. Several heatsink extrusions can be purchased from ENTTEC website.


Data Sheet

Document PN: 50071

www.enttec.com



Physical Dimension

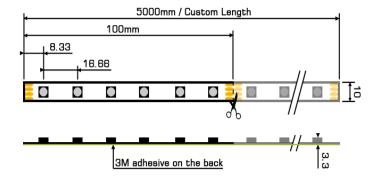

Due to continuous improvements and innovations of all ENTTEC products, specifications and features are subject to change without notice.

Ordering Information

The ENTTEC RGB strips and compatible products can be ordered from our website or through your ENTTEC dealer.

Item	Name
9VL4	RGB LED Tape (24V)
73520	ALEPH 1CV DRIVER (24V)
73526	XLR 4PIN TO SCREW TERMINAL OUTPUT CONVERTER

Email: sales@enttec.com
Website: www.enttec.com



Phone: 407-857-8770 Fax: 407-857-8771 Email: sales@techni-lux.com www.techni-lux.com