




GE
Lighting

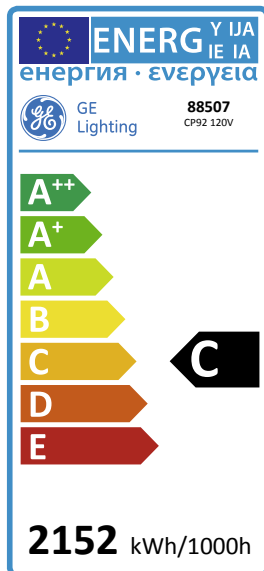

2152
kWh/1000h

C
energy class

28
lumens/watt

Single Ended Halogen CP92 120V

88507 LCP92/120V-G

Product information

Quartzline® lamps designed for optimum performance in today's precision range of stage, studio and architectural luminaires. Full range up to 24,000 W
-Range of bases to meet the needs of OEMs -
Chromised seal protection up to 500° C.

Application areas

- Film and Broadcast
- Theatre



Product data

Product Code	88507
Bulb Shape	Tubular
Bulb Diameter [mm]	31
Maximum Overall Length [mm]	175
Light Center Length [mm]	90
Net weight per piece [g]	110
Gross weight per piece [g]	165
Brand	General Electric (GE)
Cap/Base	G22

Performance data

Weighted energy consumption [kWh/1000h]	2151.38
Energy efficiency class (EEC)	C
Rated Life [h]	400
Nominal correlated colour temperature (CCT) [K]	3200
Nominal lumens [lm]	55000
Colour Rendering Index (CRI) [Ra]	100

Electrical data

Coil type	C-13D
Dimming Capability	Yes
Ballast Required	Yes
Nominal power [W]	2000
Nominal lamp voltage [V]	120

Logistic data

DUN Code	10043168885079
EAN Code	0043168885072
Pack Quantity	12
Inner pack type	BOX
Outer pack type	OUTER BOX
Layer quantity	144 EUR, 180 UK
Layer quantity EUR	144
Layer quantity UK	180
Pallet quantity EUR (PC)	1152
Pallet quantity UK (PC)	1440
Outer case size	350 x 190 x 120 (mm)
Product status	Available

Downloads & Links

[Go to the catalog site \(HTTP\)](#)

[Entertainment Solution Spectrum Catalogue \(PDF\)](#)

[Lighting design tools & calculators \(HTTP\)](#)

[High-res images / Technical drawings \(HTTP\)](#)

[Certificate for the Quality Management System of GE Lighting EMEA \(PDF\)](#)

[Certificate for the Environmental Management System of GE Lighting EMEA \(PDF\)](#)

Disclaimer

Special Purpose Lamp, Not suited for household illumination

Distributor:



Techni-Lux
www.techni-lux.com

Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com