


CSR Lamps

The GE CSR1200/S/DE/72 lamp is a compact double ended metal halide lamp with a small arc gap of 7 mm providing greater optical control and luminance. This lamp is suitable for hot restrike with maximum seal temperatures up to 500° This lamp is generally used in the event lighting field.

Product Description CSR1200/S/DE/72

•Order Description	CSR1200/S/DE/72
•Product Code	41361
•Pack Quantity	10
•Rated Wattage	1200W
•Rated Voltage	100± 10V
•Lamp Current (ECG/MCG)*	13.8A
•Ignition Voltage (cold/hot)	2.5/25MAX
•Lumens	110,000-10%Lm
•Lumens per watt	92
•Ra	>75
•Chromaticity coordinates	x 0.323 y 0.328
•Color temperature	7,200
•Arc Length (C)	7.0mm
•Lamp length (A)	MAX136
•Light center length (B)	-
•Lamp diameter	-
•Average rated life	750hr
•Base	SFc 10-4 with notch

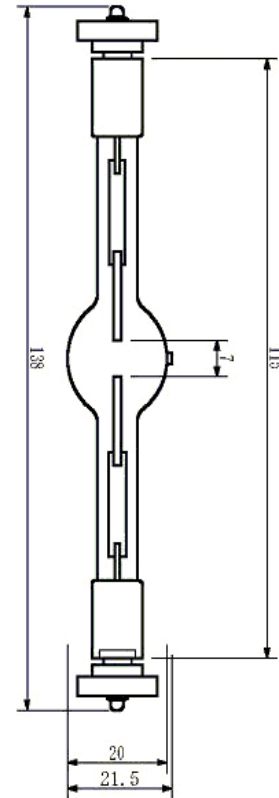

*ECG = electronic control gear/ MCG = Magnetic control gear

Lamp Operation

Burn Position	Any
Maximum Seal Temperature	500° C
Cooling	Forced Cooling/Fan

Control Gear

The CSR1200/S/DE/72 can be used on electronic or AC magnetic ballast/ igniters control gear.



GE imagination at work

Distributor:



Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com