


CSR Lamps

Color Control

The **GE CSR700/S/DE/60** provides unrivalled color control per batch and between batches. All lamps produced operate far within the limits of perceptible color change.

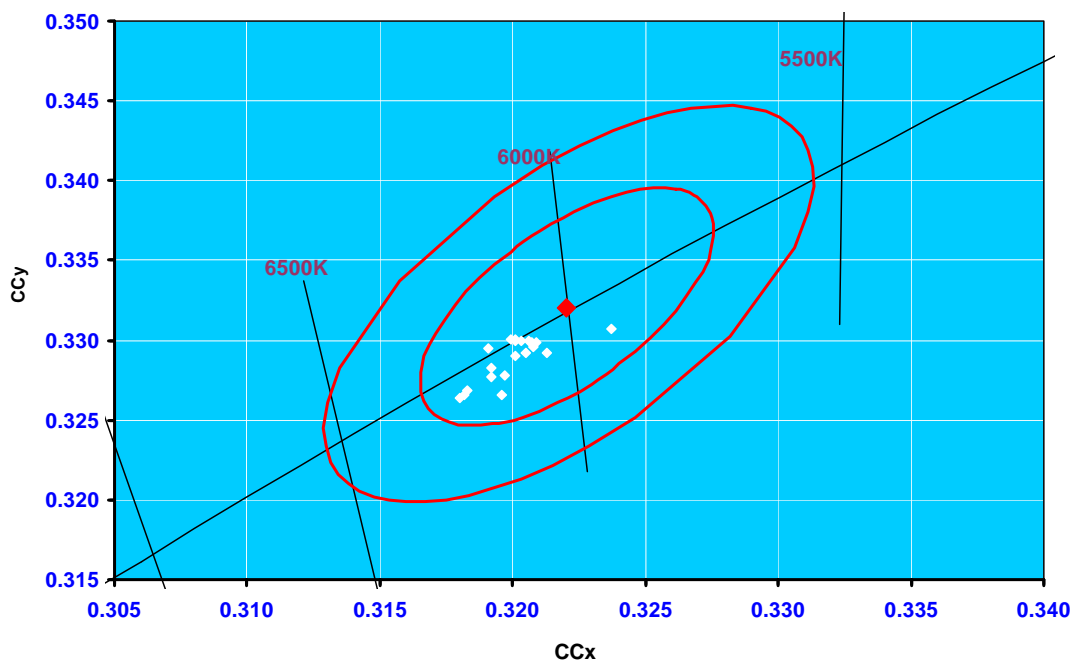

Application Information

- Do not exceed rated wattage or voltage
- Replace lamp at or before rated life of 750 hours
- Lamp should be replaced when significant optical degradation is noticed
- Do not exceed rated seal temperature of 500° C
- Use only with properly rated fixtures and ballasts
- Maximum permissible bulb temperature is 500° C



GE imagination at work

 and General Electric are both registered trademarks of the General Electric Company, USA. © General Electric Company (USA) 2006

GE Consumer & Industrial Specialty Lighting is constantly developing and improving its products. For this reason, all product descriptions in this brochure are intended as a general guide, and we may change specifications time to time in the interest of product development, without prior notification or public announcement. All descriptions in this publication present only general particulars of the goods to which they refer and shall not form part of any contract. Data in this guide has been obtained in controlled experimental conditions. However, GE Lighting cannot accept any liability arising from the reliance on such data to the extent permitted by law.

CSR400/S/DE/70 - Data sheet - April 2008