



MSD Platinum (Touring/Stage)

MSD Platinum 12 R LL 1CT/8

The MSD Platinum lamps open up new levels of creative freedom in entertainment lighting, with powerful, compact and brilliantly intense light. Their compact, lightweight design provides the freedom to create smaller, lighter luminaires – for use at any location on stage. And their short arc, high color temperature and innovative reflector produce a sparkling, high beam intensity for outstanding color reproduction. They also offer long and reliable lifetime, high efficacy and fast replacement times. It all adds up to an intensely exciting creative experience.

Warnings and Safety

- A lamp breaking is extremely unlikely to have any impact on your health. If a lamp breaks, ventilate the room for 30 minutes and remove the parts, preferably with gloves. Put them in a sealed plastic bag and take it to your local waste facilities for recycling. Do not use a vacuum cleaner.

Product data

General Information	
Cap-Base	- [-]
Operating Position	UNIVERSAL [Any or Universal (U)]
Main Application	Stage/Touring
Life to 50% Failures (Nom)	2000 h
Life to 50% Failures entertainment cycle (Nom)	6000 h
System Description	Reflector-E20.6
Light Technical	
Color Code	2
Luminous Flux (Min)	15000 lm
Luminous Flux (Nom)	17100 lm
Chromaticity Coordinate X (Max)	318

Chromaticity Coordinate X (Min)	285
Chromaticity Coordinate X (Nom)	303
Chromaticity Coordinate Y (Max)	324
Chromaticity Coordinate Y (Min)	294
Chromaticity Coordinate Y (Nom)	309
Correlated Color Temperature (Nom)	7800 K
Operating and Electrical	
Power (Nom)	260 W
Voltage (Max)	80 V
Voltage (Min)	55 V

MSD Platinum (Touring/Stage)

Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Cap-Base Information	-
Luminaire Design Requirements	
Pinch Temperature (Max)	350 °C
Product Data	
Full product code	871869968354200

Order product name	MSD Platinum 12 R LL 1CT/8
EAN/UPC - Product	8718699683542
Order code	928496705314
Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	8
Material Nr. (12NC)	928496705314
Net Weight (Piece)	72.000 g



Dimensional drawing

D

Product	D (max)	T (max)	O	C (max)
MSD Platinum 12 R LL 1CT/8	51.5 mm	6.8 mm	0.95 mm	57.1 mm

MSD Platinum 12 R LL

Photometric data

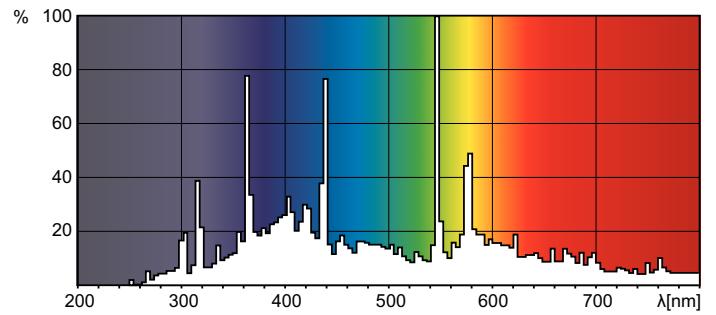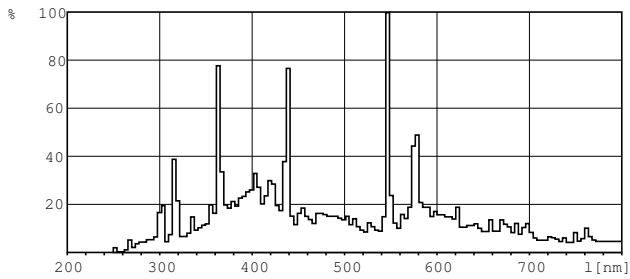

MSD Platinum (Touring/Stage)



© 2020 Signify Holding All rights reserved. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify. Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V.

Distributor:


Techni-Lux
www.techni-lux.com

Phone: 407-857-8770
Fax: 407-857-8771
Email: sales@techni-lux.com

www.lighting.philips.com

2020, March 19 - data subject to change